Flameproof Digital Temperature Indicator TI-603
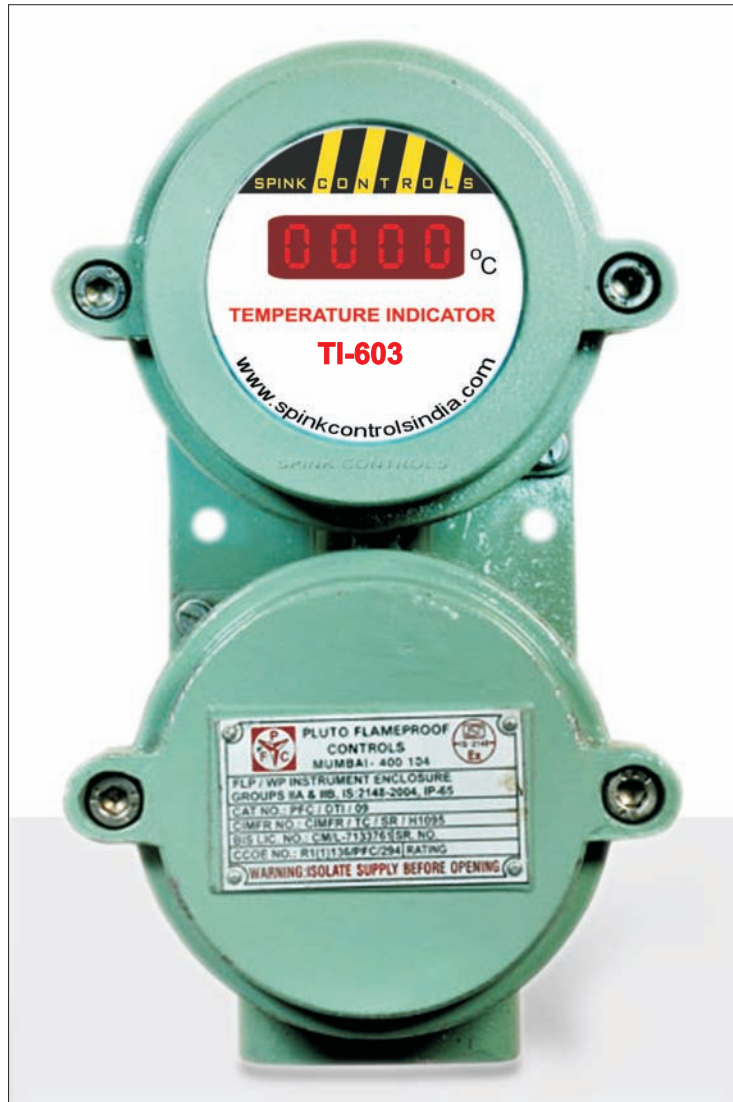

TECHNICAL SPECIFICATION

Temperature Range	:	-50 to 300^{o}C
		-50 to 199.9^{o}C
Resolution	:	1^{o}C / 0.1^{o}C
Accuracy	:	± 0.5% OF FSD
Linearity	:	Better than 0.1^{o}C or 1 Digit
Type	:	RTD (PT 100)
Display	:	3 ½ digit (± 1999) 7 segment LED display
Supply Voltage	:	230 V 50 Hz
Enclosure	:	DIN std / Flameproof Aluminum Die casting

JAS-ANZ

An ISO 9001:2008
Certified Company